




DESIGN STANDARDS FOR: IRRIGATION SYSTEMS

1. The following note shall be included on the drawings or in the irrigation system specifications:
 - a. "Irrigation boxes shall include a lockable lid and locking hardware such as bolts and clips necessary for access-proof security."
 - b. Provide locking lid and hardware by Carson, or equivalent (see attachment) Series number's 1419 or and 1324. or equivalent
2. There shall be no gate valves on any irrigation or plumbing systems. All shall be ball valves.
3. Quick couplers shall be by Buckner, 1" Brass.
4. All laterals and irrigation pipe shall be minimum wall thickness of schedule 40. No exceptions.
5. All inlet inline plastic valves for irrigation shall be Rainbird 150PESB - 1 1/2 in. Inlet Inline Plastic Industrial Irrigation Valve or sized appropriate to the system., or equivalent. All inline valves shall be plastic industrial.

General Detail Medium Box Series 1324

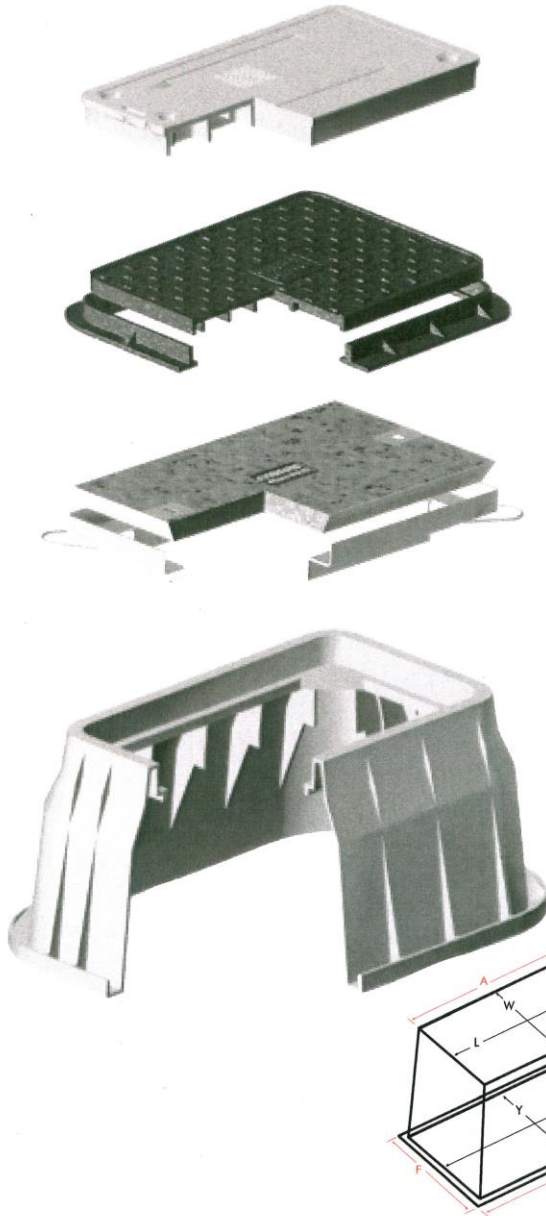

Product **HDPE Drop-in Cover**
1324-2B Bolt Down Cover

Product **Iron Cover & Frame**
EN124 Class B125
Cast/Ductile Iron Cover and Frame

Product **Concrete Cover & Frame**
EN124 Class B125
Concrete Infill and Galvanised Steel Frame

Product **Box**
1324-15B (with Insert)

Dimensions:
Inside **Outside**
L/W 600/355 **A/B 645/400** D 390
X/Y 760/575 **E/F 835/590**

Product **Box**
(not shown) 1324-18

Dimensions:
Inside **Outside**
L/W 565/325 **A/B 630/390** D 455
X/Y 790/540 **E/F 860/620**

Product **Base Extension**
(not shown) 1324-8
L/W 790/540 **A/B 860/620** D 205

- Options & Accessories:**
- Box colours available: Black, Green. Other colours to special order.
 - 102 x 102 Knock Out (2 places)

Application Notes: Carson boxes are suitable for a wide range of applications, from grass verge (A15) to car park applications (B125). It is important to select the correct cover and frame and installation method to suit the loading and local conditions. Technical advice is available from Carson. These products are not designed for carriageway use. All dimensions to nearest 5mm. Due to our policy of continuous improvement, we reserve the right to change specifications without notice.



Roscommon, Ireland
Phone: +353 (0)903 25922
Fax: +353 (0)903 25921
email: sales.europe@carsonind.com



IS EN ISO 9001



Reg. No. M3257



Glendora, California

www.carsonind.com

Technical Specifications Medium Box Series 1324

Material Data

(Specification available on request)

Structural Foam - High Density Polyethylene

HDPE has excellent chemical resistance to ethanol, acetone, diesel etc. and is unaffected by sulfate ground conditions.


- Recyclable
- Robust - no breakage waste
- Completely impervious to water
- Nitrogen injection creates cellular core (CFC free)
- High strength to weight ratio
- High stiffness to weight ratio
- Easy to cut for duct entries

Properties of unfoamed resin	Test Method	HDPE
Tensile Strength	ISO 1926	21.37 - 37.92 N/mm ²
Flexural Modulus	ISO 1290 - 2	1103 - 1447 N/mm ²
Notched Izod Impact Strength	ISO 180 - 1A	270 - 800 J/M
Deflection Temperature	ISO 75 - 1	73 - 82°
Density	ISO 8962	0.955 g/cm ³
Chemical Resistance	-	Excellent
Water Absorption	-	None

Vertical Load Rating

Meets the loading requirements of EN124 Class B125 i.e. 125kN (~12.5T) test load when tested in free standing load tests - independent of backfill. Suitable for areas accessible to all slow moving traffic.

Variants

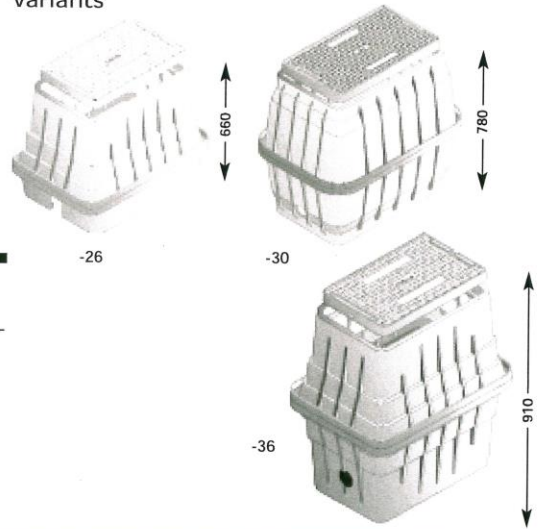


Cover and Frame Options

	-15	-18
· HDPE (A15)	✓	✓
· Concrete Infill Cover & Galvanised Steel Frame (EN124 Class B125)	✓	✓
· Cast/Ductile Iron Cover & Frame (EN124 Class B125)	✓	✓

Other options available on request.

Shipping Configuration

	1324-15B	1324-18
#/pallet	26	28
L	1220	1220
W	825	825
H	2670	2415



Application Notes: Carson boxes are suitable for a wide range of applications, from grass verge (A15) to car park applications (B125). It is important to select the correct cover and frame and installation method to suit the loading and local conditions. Technical advice is available from Carson. These products are not designed for carriageway use. All dimensions to nearest 5mm. Due to our policy of continuous improvement, we reserve the right to change specifications without notice.



Roscommon, Ireland
 Phone: +353 (0)903 25922
 Fax: +353 (0)903 25921
 email: sales.europe@carsonind.com



Glendora, California

www.carsonind.com

END OF SECTION