


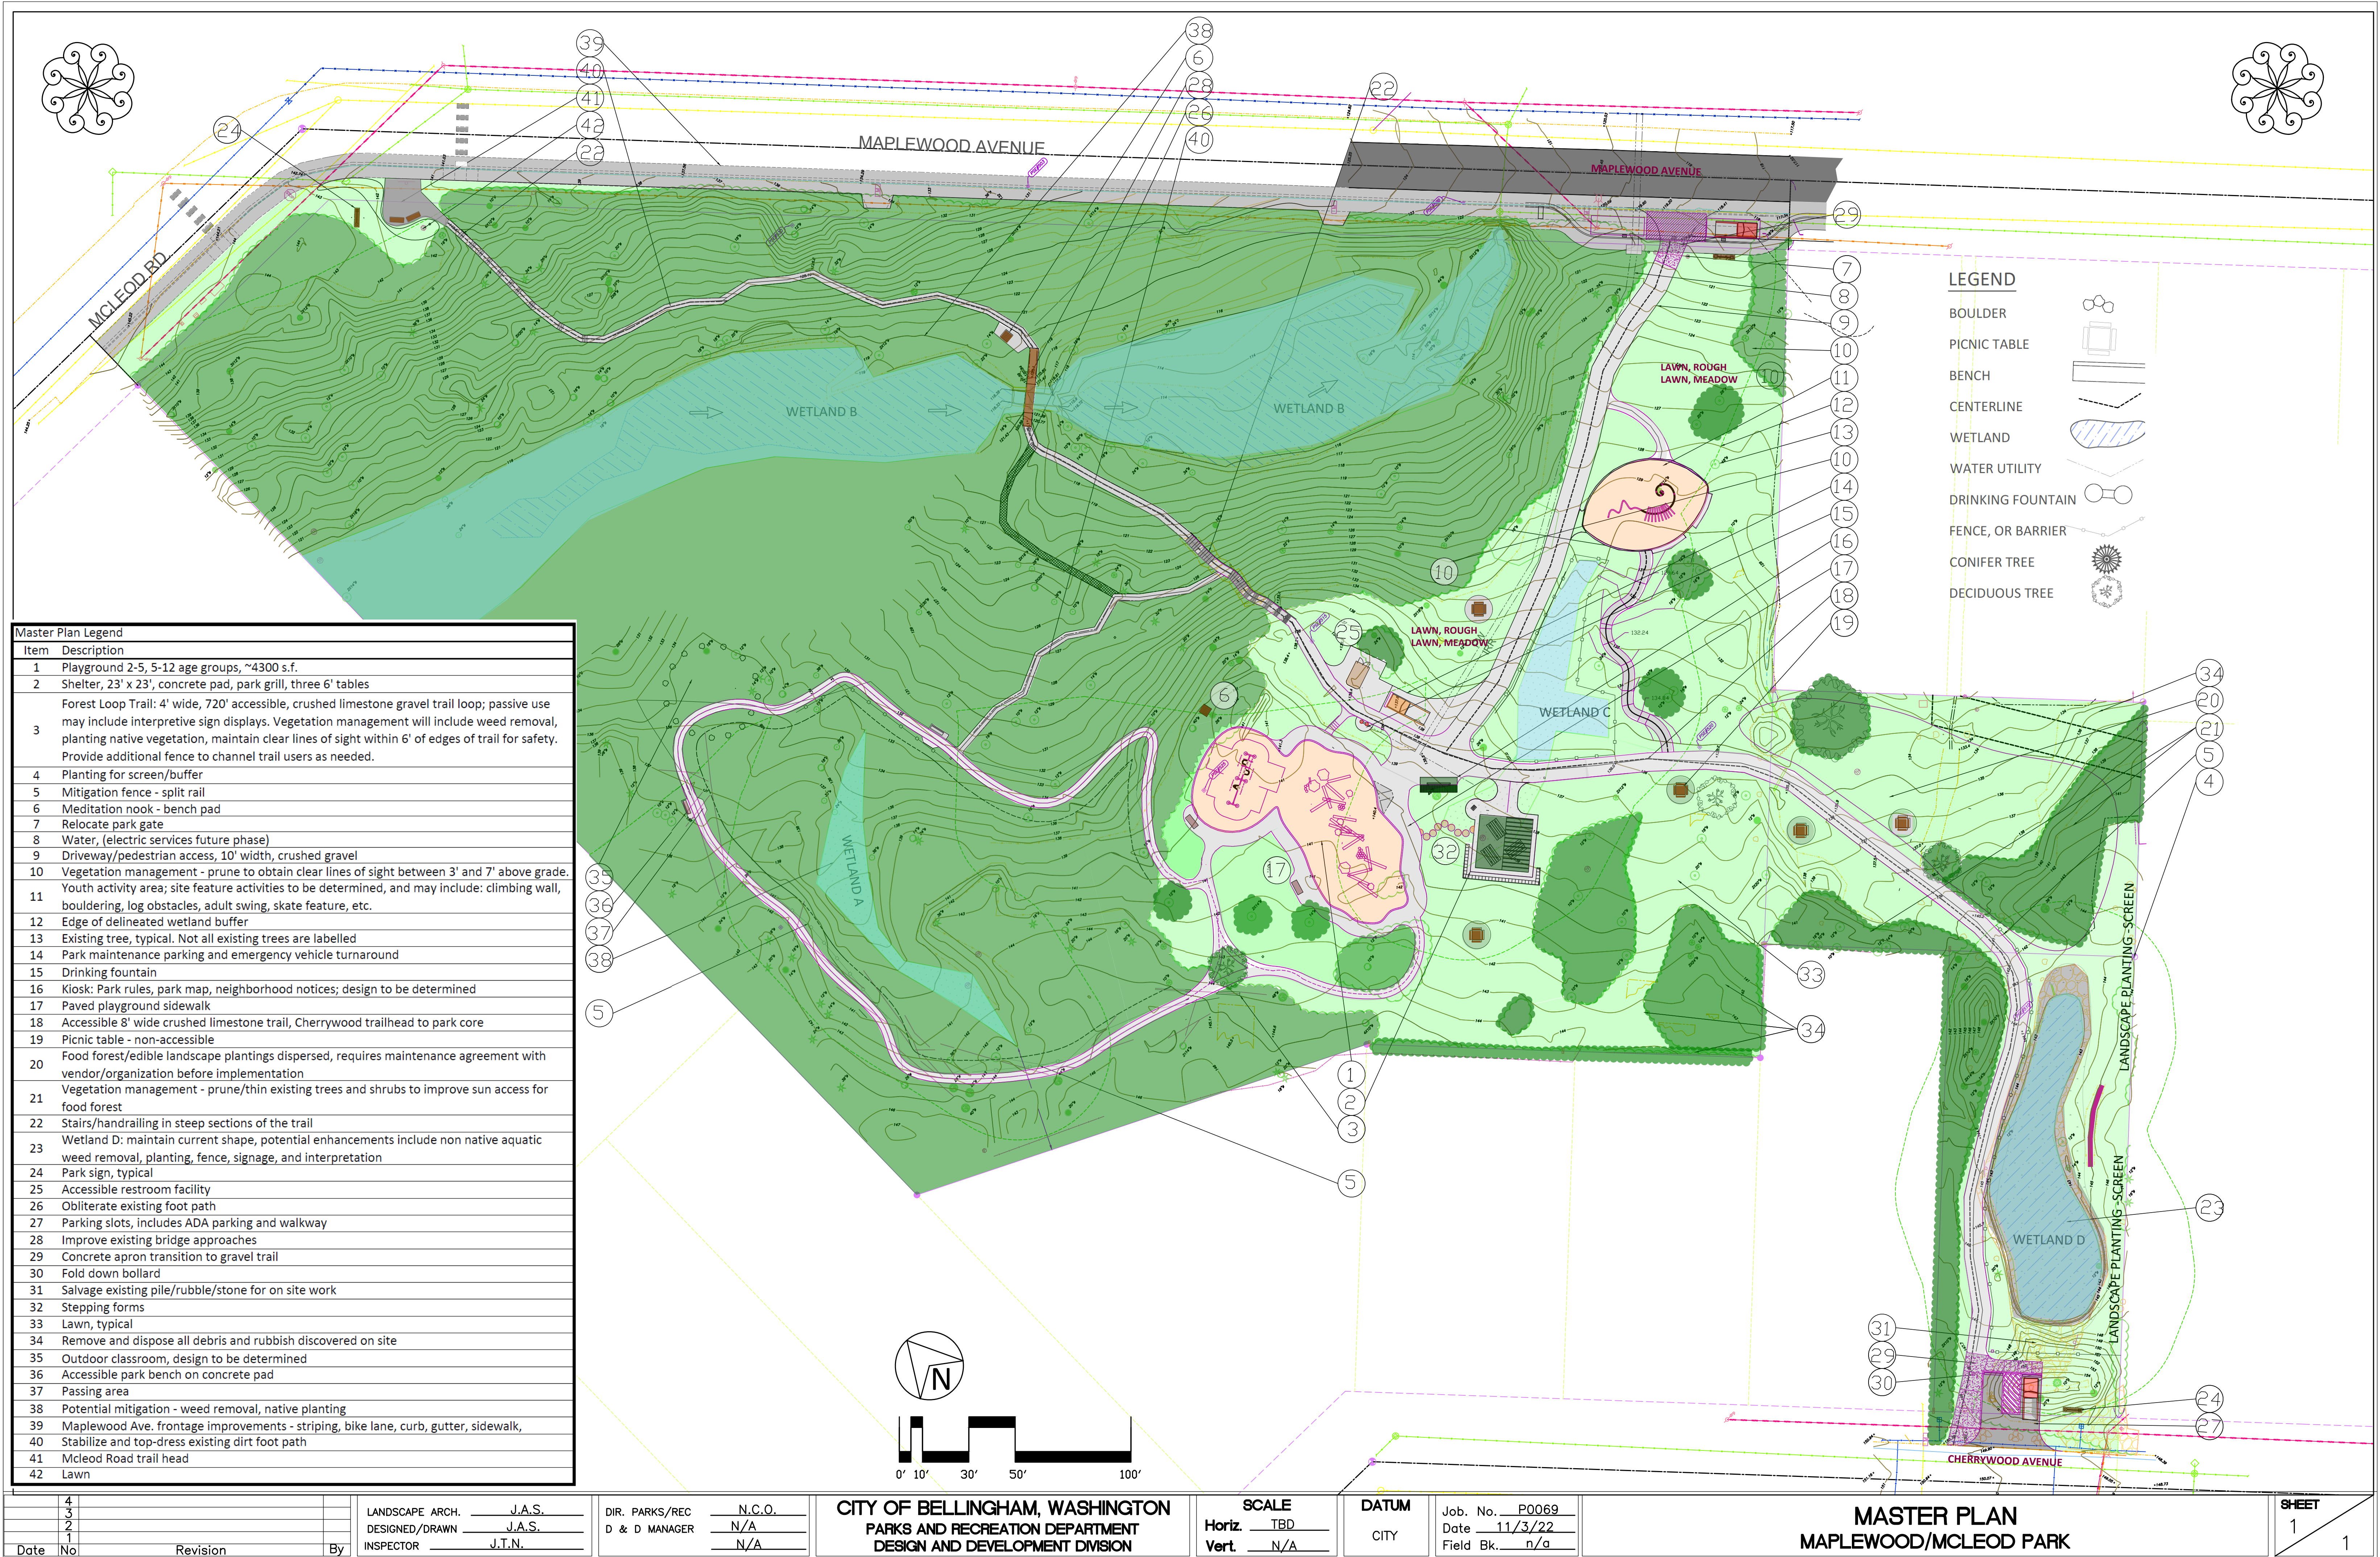

Master Plan Legend	
Item	Description
1	Playground 2-5, 5-12 age groups, ~4300 s.f.
2	Shelter, 23' x 23', concrete pad, park grill, three 6' tables
3	Forest Loop Trail: 4' wide, 720' accessible, crushed limestone gravel trail loop; passive use may include interpretive sign displays. Vegetation management will include weed removal, planting native vegetation, maintain clear lines of sight within 6' of edges of trail for safety. Provide additional fence to channel trail users as needed.
4	Planting for screen/buffer
5	Mitigation fence - split rail
6	Meditation nook - bench pad
7	Relocate park gate
8	Water, (electric services future phase)
9	Driveway/pedestrian access, 10' width, crushed gravel
10	Vegetation management - prune to obtain clear lines of sight between 3' and 7' above grade.
11	Youth activity area; site feature activities to be determined, and may include: climbing wall, bouldering, log obstacles, adult swing, skate feature, etc.
12	Edge of delineated wetland buffer
13	Existing tree, typical. Not all existing trees are labelled
14	Park maintenance parking and emergency vehicle turnaround
15	Drinking fountain
16	Kiosk: Park rules, park map, neighborhood notices; design to be determined
17	Paved playground sidewalk
18	Accessible 8' wide crushed limestone trail, Cherrywood trailhead to park core
19	Picnic table - non-accessible
20	Food forest/edible landscape plantings dispersed, requires maintenance agreement with vendor/organization before implementation
21	Vegetation management - prune/thin existing trees and shrubs to improve sun access for food forest
22	Stairs/hand railing in steep sections of the trail
23	Wetland D: maintain current shape, potential enhancements include non native aquatic weed removal, planting, fence, signage, and interpretation
24	Park sign, typical
25	Accessible restroom facility
26	Obliterate existing foot path
27	Parking slots, includes ADA parking and walkway
28	Improve existing bridge approaches
29	Concrete apron transition to gravel trail
30	Fold down bollard
31	Salvage existing pile/rubble/stone for on site work
32	Stepping forms
33	Lawn, typical
34	Remove and dispose all debris and rubbish discovered on site
35	Outdoor classroom, design to be determined
36	Accessible park bench on concrete pad
37	Passing area
38	Potential mitigation - weed removal, native planting
39	Maplewood Ave. frontage improvements - striping, bike lane, curb, gutter, sidewalk,
40	Stabilize and top-dress existing dirt foot path
41	McLeod Road trail head
42	Lawn