


ENLARGED SECTION VIEW - TOP

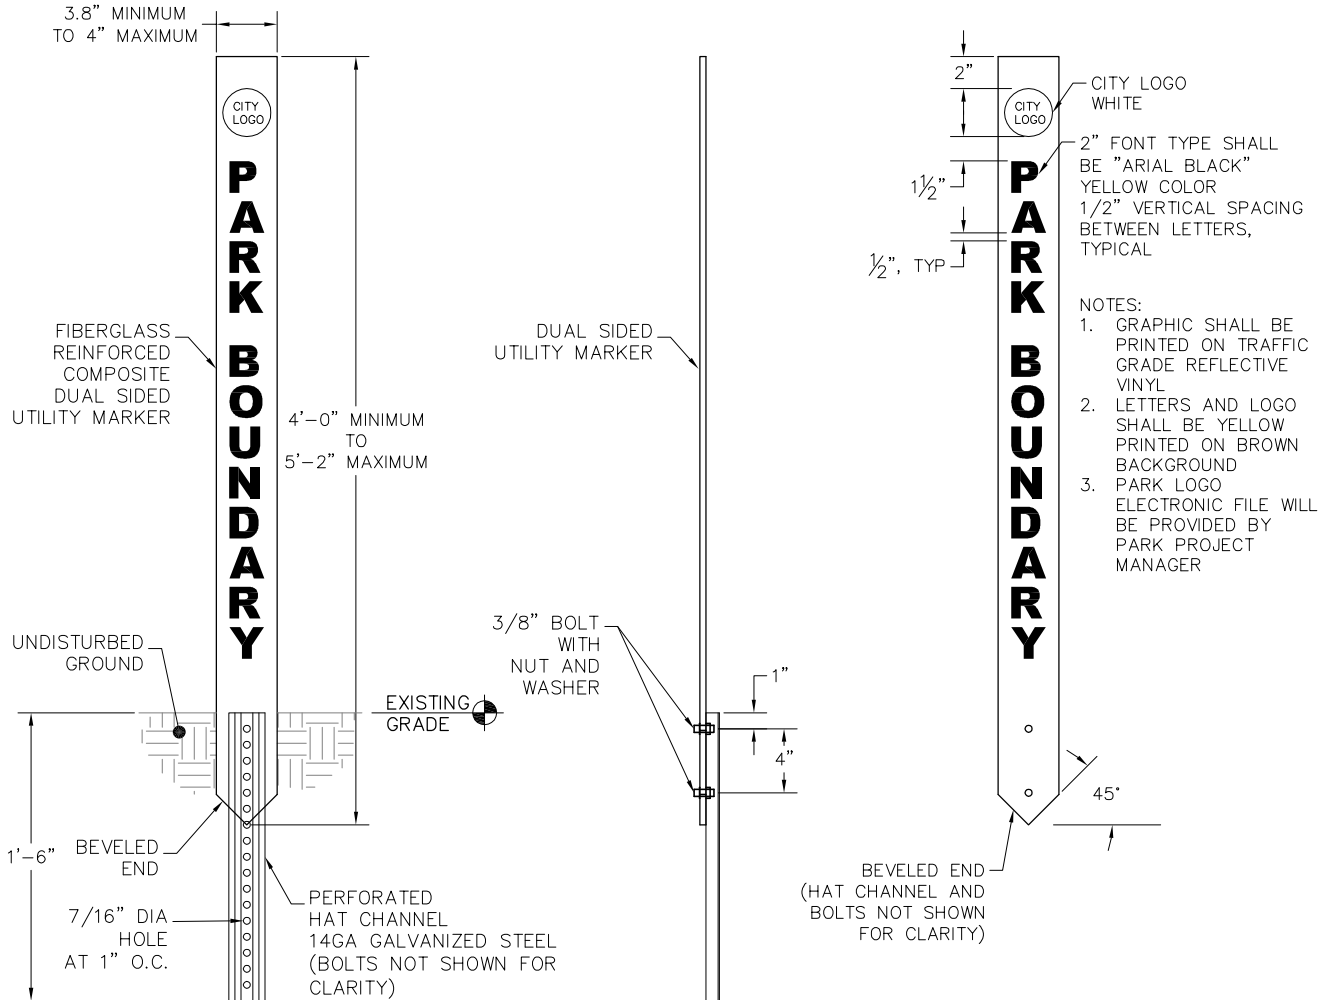

ELEVATION FRONT/BACK ELEVATION - SIDE ELEVATION - FRONT

NOTES:

- A. BOUNDARY MARKERS SHALL BE INSTALLED AS DIRECTED BY THE PARK PROJECT MANAGER WHEN THE PARK PROPERTY OR PROPERTY ABUTTING PARK PROPERTY IS SURVEYED.
- B. BOUNDARY MARKERS LOCATED IN PAVEMENT AND SIDEWALKS AND OTHER AREAS AS DIRECTED BY PARK PROJECT MANAGER SHALL MEET THE REQUIREMENTS OF THE PUBLIC WORKS STANDARD FOR CONCRETE MONUMENTS.
- C. WHEN REQUIRED BY THE PARK PROJECT MANAGER, BOUNDARY MARKERS SHALL BE INSTALLED AT PROPERTY CORNERS, INTERSECTING LOT LINES, AND AT INTERVALS OF ONE MARKER PER 100 FT ALONG A STRAIGHT LINE. STRAIGHT LINE INTERVAL DISTANCE MAY BE DECREASED AT THE DISCRETION OF THE PARK PROJECT MANAGER IN ORDER TO MAINTAIN A LINE OF SIGHT FROM ONE MARKER TO THE NEXT MARKER.
- D. MARKER MATERIAL SHALL BE FIBERGLASS REINFORCED COMPOSITE, SOLID COLOR IMPREGNATED DARK BROWN, UV RESISTANT, WITH A MINIMUM MATERIAL WEIGHT OF 0.48 POUNDS/FOOT. ALL FASTENERS SHALL BE HOT DIPPED GALVANIZED.
- E. SUGGESTED SUPPLIERS: CARSONITE INTERNATIONAL PHONE# 1-800-648-7916 WWW.CARSONITE.COM
 QUANTUM MARKERS PHONE# 1-866-778-6017 WWW.QUANTUMMARKERS.COM
 BONE SAFETY SIGNS PHONE #1-800-873-2399 WWW.BONESAFETY.COM
 GLASS FORMS INC PHONE #1-888-297-3800 WWW.GLASSFORMS.COM

PARKS AND RECREATION
 DESIGN AND DEVELOPMENT
 MAY 11, 2018

CITY OF BELLINGHAM
 PARK BOUNDARY MARKER
 Scale: 1" = 1'-0"

DRAWING
 10430.07