



EXISTING ASPHALT CONCRETE PAVEMENT

A. PATCH WIDTH 3' OR GREATER

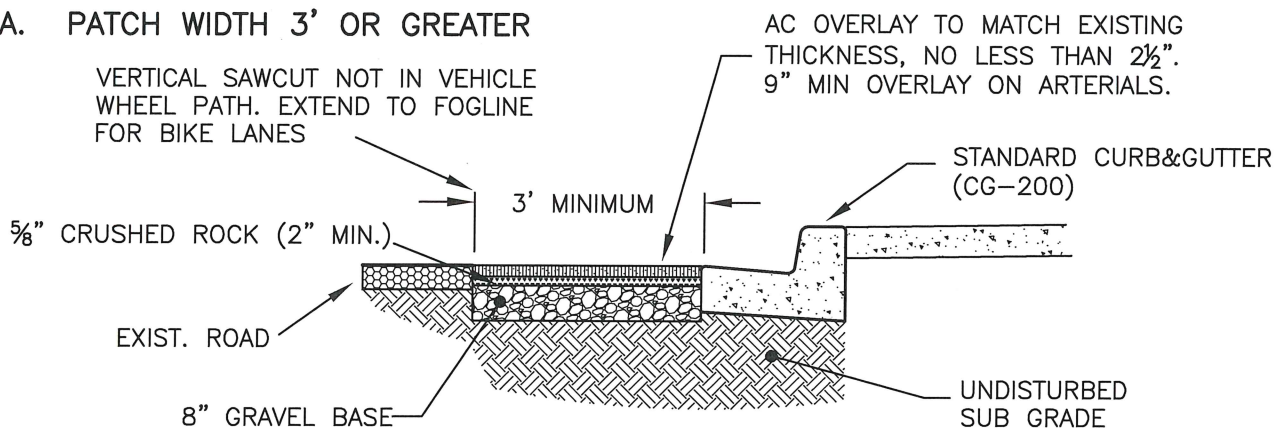

B. PATCH WIDTH 18" TO 36"

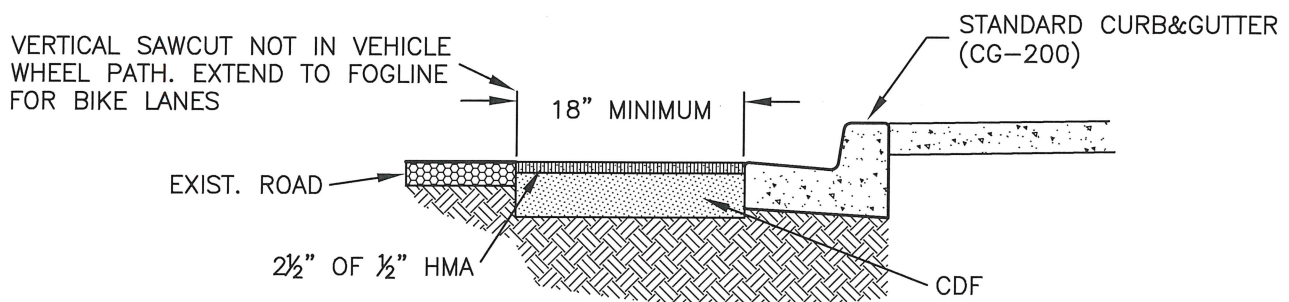

NOTES:

ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE CITY OF BELLINGHAM'S STANDARD SPECIFICATIONS FOR UTILITY CUTS IN STREET AREA.

FOR ASPHALT CONCRETE PAVEMENT, TACK ALL EDGES AND HMA BASE SURFACE BEFORE PLACING HMA PAVEMENT. SEAL ALL JOINTS WITH HOT ASPHALT (AR-4000W) BETWEEN EXISTING AND NEW HMA PAVEMENT IMMEDIATELY AFTER FINISH ROLLING.

CONTRACTOR SHALL MATCH EXISTING SURFACES THAT ARE COLORED, TEXTURED, STAMPED OR INLAID WITH BRICK.

APPROVED


City Engineer

15 JUNE 2016

Date

CITY OF BELLINGHAM

PAVEMENT REPAIR
(CURB REPLACEMENT)

DRAWING

CG-218