
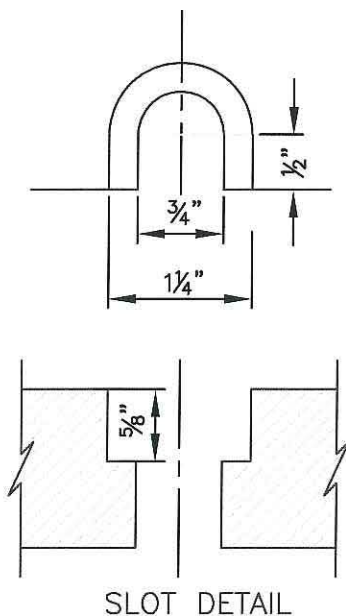


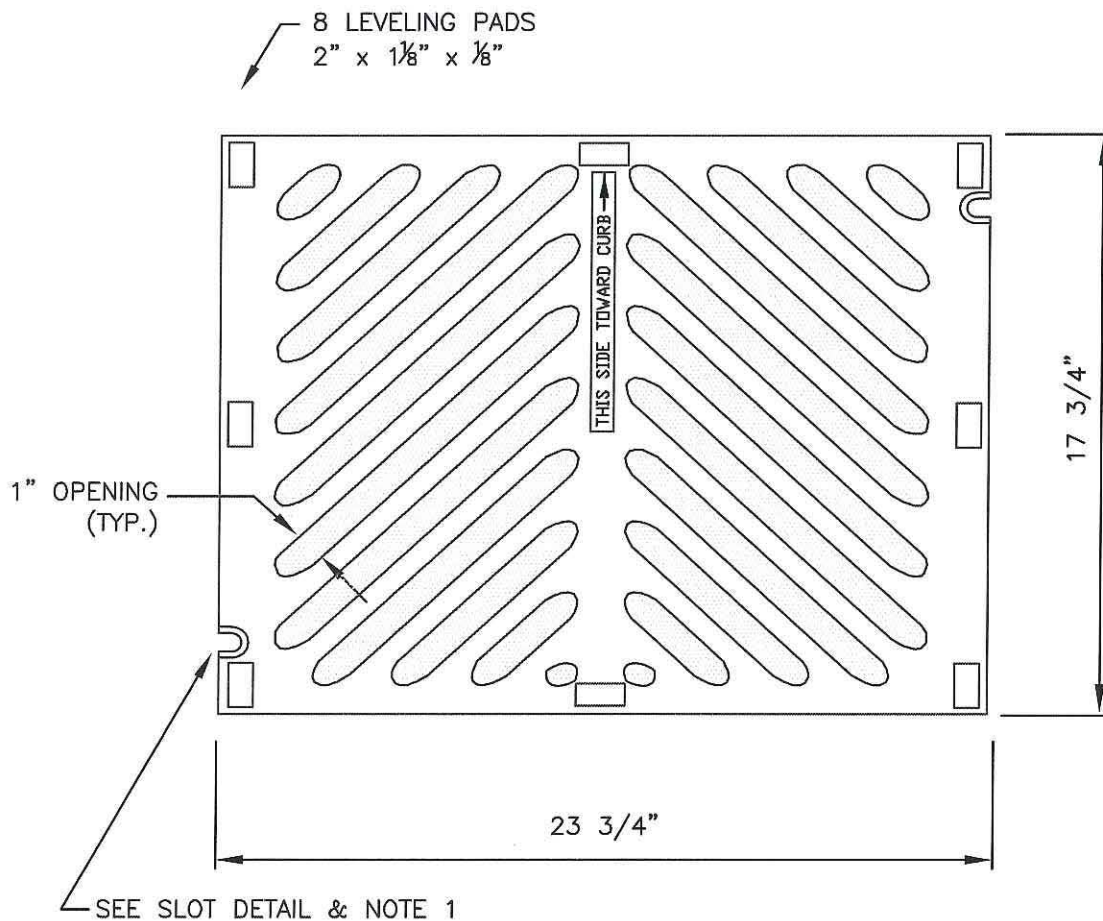

NOTES

1. WHEN BOLT DOWN GRATES ARE SPECIFIED IN THE CONTRACT, PROVIDE TWO SLOTS IN THE GRATE THAT ARE VERTICALLY ALIGNED WITH THE HOLES IN THE FRAME. LOCATION OF BOLT DOWN SLOTS VARIES AMONG DIFFERENT MANUFACTURERS.
2. REFER TO STANDARD SPECIFICATION 9-05.15(2) FOR ADDITIONAL REQUIREMENTS.
3. FOR FRAME DETAILS, SEE STANDARD PLAN B-2A.
4. THE THICKNESS OF THE GRATE SHALL NOT EXCEED 1 5/8"

APPROVED

Rory J. Smith
City Engineer

5/29/14
Date

CITY OF BELLINGHAM

HERRINGBONE GRATE FOR
CATCH BASINS AND INLETS

DRAWING

DR-502