


TYPICAL CROSS SECTION

NTS

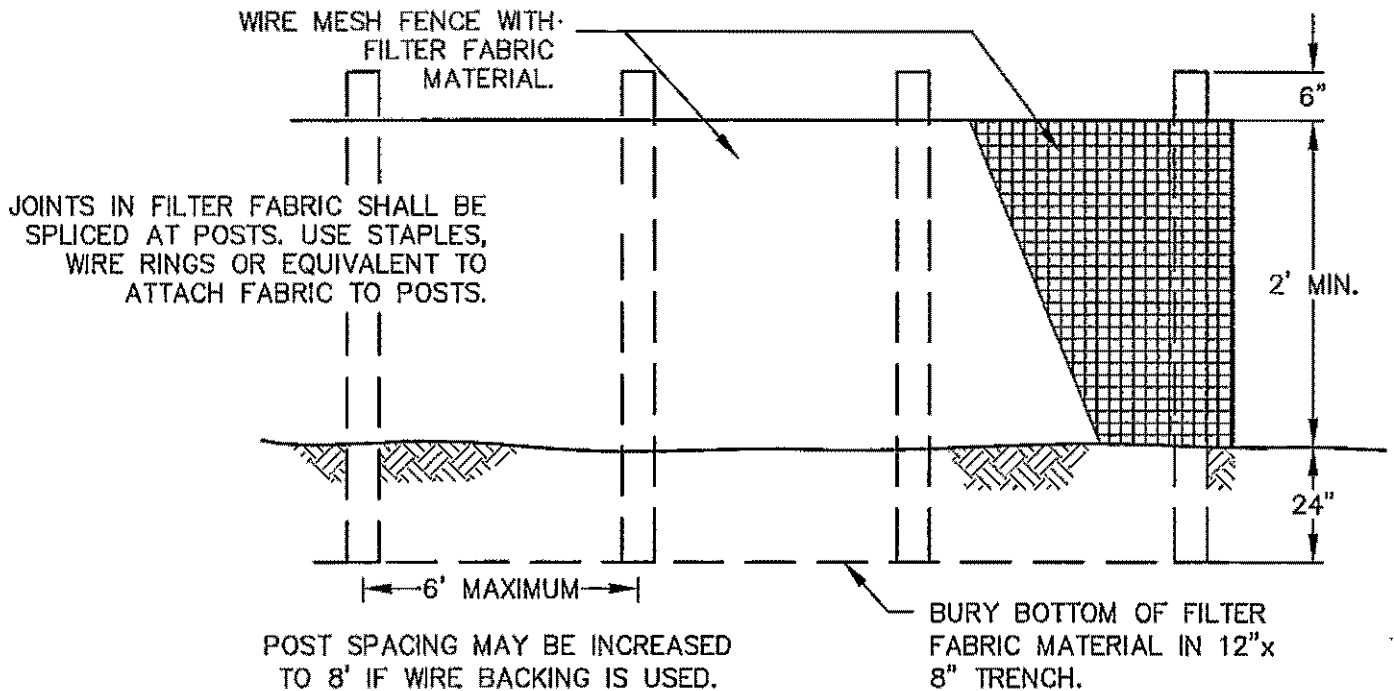

ELEVATION

NTS

NOTES:

1. FENCE SHALL NOT BE INSTALLED ON SLOPES STEEPER THAN 2:1.
2. JOINTS IN FILTER FABRIC SHALL BE OVERLAPPED 6 INCHES AT POST.
3. USE STAPLES, WIRE RINGS, OR EQUIVALENT, TO ATTACH FABRIC TO WIRE FENCE.
4. REMOVE SEDIMENT WHEN IT REACHES 1/3 FENCE HEIGHT.

APPROVED
Perp. Smith
 City Engineer

11/29/04
 Date

CITY OF BELLINGHAM
 REINFORCED SILT FENCE

DRAWING
 EC-615