



DRILL & TAP (SPLITTING THE SEAM) SET MADE BOLT-DOWN WITH $\frac{3}{8}$ " S.S. ALLEN HEAD BOLTS - 2 PLACES

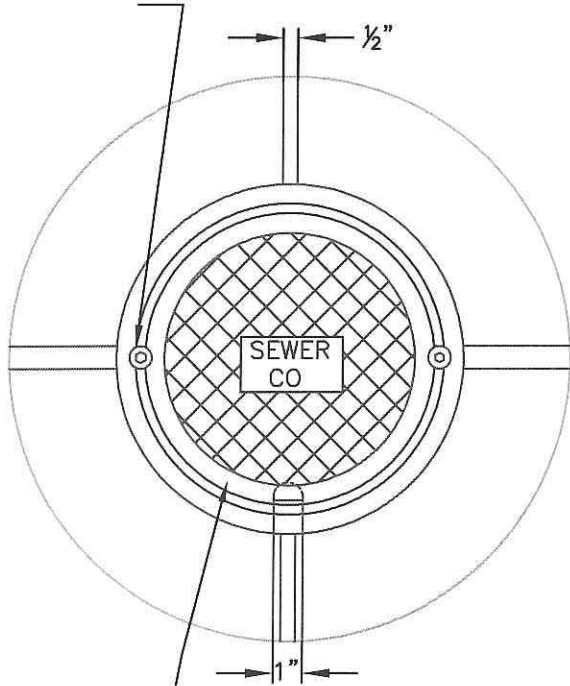

$\frac{1}{8}$ " RAISE - $\frac{1}{2}$ " WIDE BORDER

PVC FEMALE PIPE THREADED HUB ADAPTER AND PLUG

PAVEMENT OR FINISH GRADE

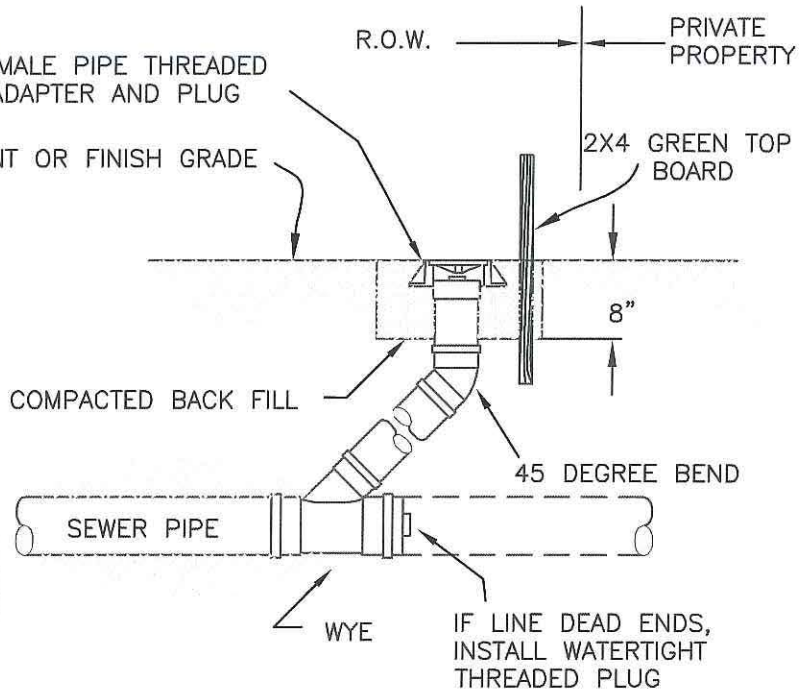

COMPACTED BACK FILL



45 DEGREE BEND

SEWER PIPE

WYE

IF LINE DEAD ENDS, INSTALL WATERTIGHT THREADED PLUG

CLEAN-OUT LID MUST BE AT LEAST 2" ABOVE PVC PLUG

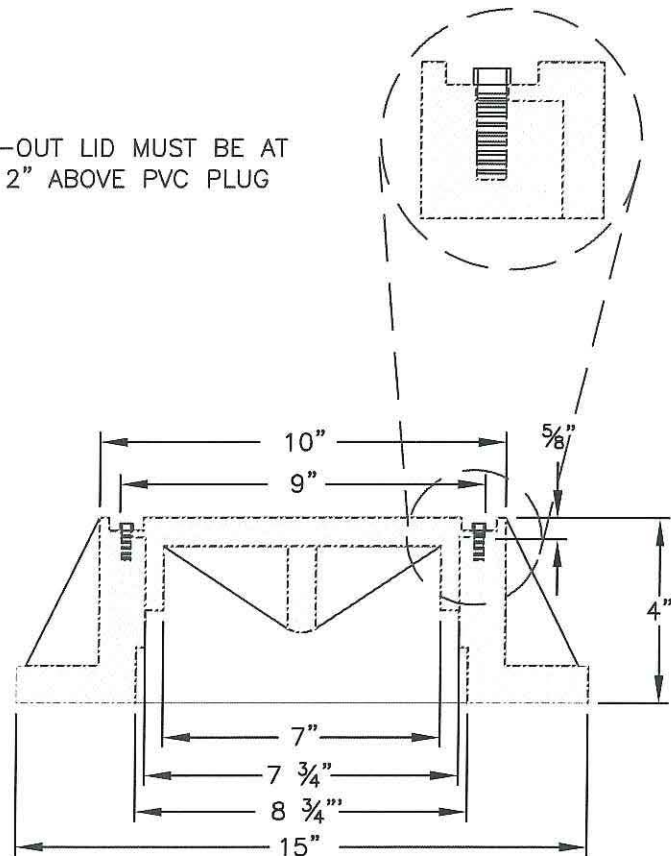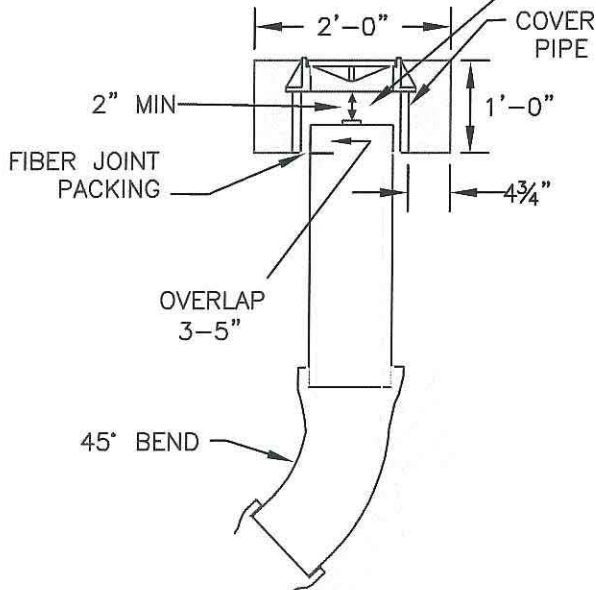

NOT TO SCALE

APPROVED

[Signature]

City Engineer

5/29/14

Date

CITY OF BELLINGHAM

SIDE SEWER CLEAN-OUT LID

DRAWING

SS-735