



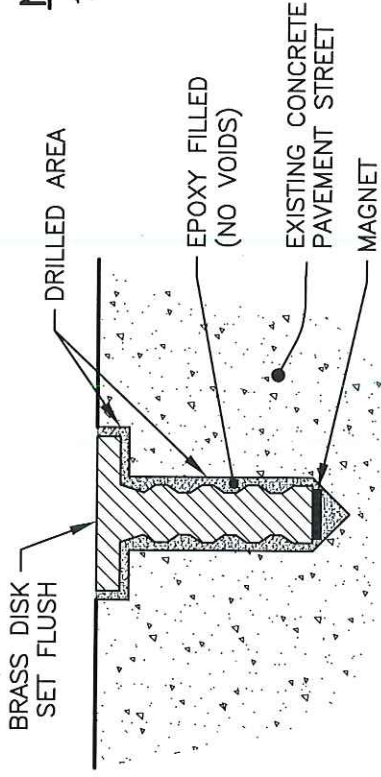

NOTE:

1. DRILLED AREA SHALL BE THOROUGHLY CLEANED PRIOR TO APPLICATION OF EPOXY AND SETTING OF BRASS DISK.

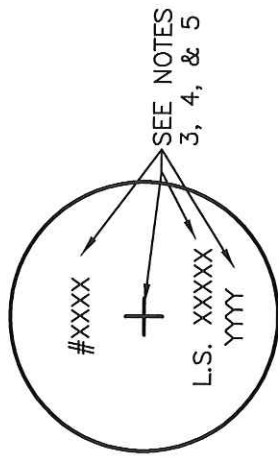

**BRASS DISK
DETAIL**

**EPOXY TYPE BRASS DISK
IN CONCRETE PAVEMENT (PCC)**

GENERAL NOTES:

1. BRASS DISK TO BE EQUAL TO OR BETTER THAN SURV-KAP MODEL M/M-B2 (2" DIAMETER MIN. WITH $\frac{3}{4}$ " DIAMETER x 2" SHANK), WITH A MAGNET GLUED TO THE END OF THE SHANK.
2. POSITION OF BRASS DISK SO THAT PUNCH-MARK FALLS NO CLOSER THAN $\frac{1}{4}$ " FROM THE EDGE OF DISK.
3. EXACT LOCATION OF CONTROL POINT SHALL BE PUNCHED AFTER EPOXY HAS SET.
4. DISK SHALL BE STAMPED WITH CITY ASSIGNED MONUMENT NUMBER, SURVEYOR'S LICENSE NUMBER, AND THE YEAR THE MONUMENT IS PUNCHED (YYYY).
5. IF A PLS MONUMENT, DISK SHALL BE STAMPED ACCORDING TO WAC 332-130-030 AND THE CURRENT BLM MANUAL OF SURVEYING INSTRUCTIONS.
6. TIE OUT THE MONUMENT USING TRANSIT TIES WITH DISTANCES AND TWO ANGLES, SUBMIT TIE-OUT DOCUMENTATION ON CITY MONUMENT INFORMATION FORM TO THE CITY PUBLIC WORKS DEPARTMENT.
7. COMPLETE THE DNR MONUMENT REMOVAL PERMIT PROCESS.(RCW 58.24.040, WAC 332-120)

APPROVED


City Engineer

5 May 2017
Date

CITY OF BELLINGHAM

MONUMENT IN
CONCRETE (PCC) STREET

DRAWING

ST-171