



SLMS SHALL BE PLACED IN THE CENTER OF EACH TRAVEL LANE, AND

- ON STREETS WITH PARALLEL PARKING, SLMS SHALL BE CENTERED AT LEAST 11' FROM FACE OF CURB OR EDGE OF ROADWAY.
- ON STREETS WITH NO PARKING, SLMS SHALL BE CENTERED AT LEAST 4' FROM FACE OF CURB OR EDGE OF PAVEMENT.
- ON STREETS WITH ANGLED PARKING, SLMS SHALL BE CENTERED AT LEAST 22' FROM FACE OF CURB OR EDGE OF PAVEMENT.

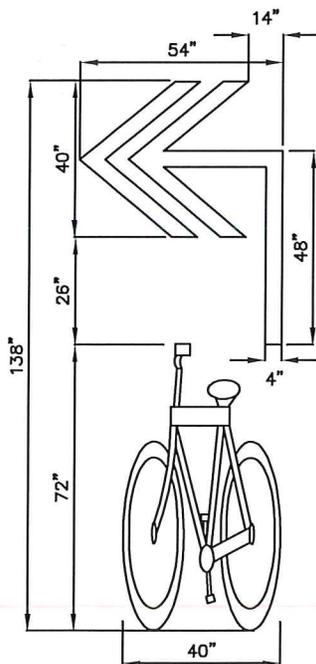

RIGHT OR LEFT TURN
SHARED LANE MARKING (SLM) SYMBOL

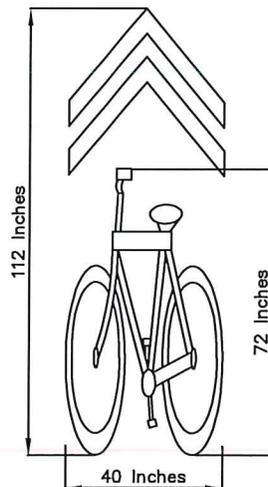

SHARED LANE MARKING (SLM) SYMBOL

- REQUIRED AFTER EACH INTERSECTION, AND AT INTERVALS NOT EXCEEDING 500'
- ALL MARKINGS SHALL BE WHITE PLASTIC PREMARK, OR ENGINEER APPROVED EQUAL

APPROVED

[Signature]
City Engineer

22 MAR 2018
Date

CITY OF BELLINGHAM

SHARED LANE MARKING
STANDARD

DRAWING

TC-316